




Instruction Sheet




Power Input



OPEN ON/OFF



Program Times / Change Arc Color / Flashing




Power Output

CHANGE ARC COLOR - SOLID (no flashing)

1. Turn the OPEN portion of the sign "ON" using the "ON/OFF" switch located on the side of the sign.
2. If the arcs and OPEN are solid (no flashing), please go to "Step #3" below. If the OPEN and arcs are flashing, press the "MODE" button until the arcs are solid (no flashing). You might have to press the mode button several times to cycle through all of the different modes.

3. Press "CLR1" to change color of Top Arc. Keep pressing buttons to cycle through color options.
4. Press "CLR2" to change color of Bottom Arc. Keep pressing buttons to cycle through color options.

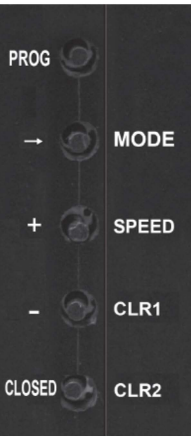

CHANGE ARC COLOR - FLASHING

1. Press "MODE" to cycle through animation options.

7 MODES

	MODE	1. Static - No Animation
	SPEED	2. Multi-Color
	CLR1	3. Double Trace
	CLR2	4. Single Trace
		5. Fade
		6. Blink
		7. Rotates Through All Effects

2. Once desired animation mode is selected, press the "SPEED" button to control how fast/slow the animation cycles. Keep pressing button until desired speed is reached.

PROGRAM TIMES

1. Press "PROG". The time will blink in the first box.
2. Use the + and - to adjust the time up or down.
3. Press the arrow to move to the next box.
4. Repeat step 2.
5. To change a day of the week to CLOSED, press the arrow until time is flashing on the day of the week that you want set to CLOSED. Press the CLOSED button.
6. Press "PROG" to complete the programming process.

FCC Notice

Note: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. CAN ICES-3 (B)/NMB-3 (B). This Class B digital apparatus complies with Canadian ICES 003.